



RevN-	Revision Note	Date	Signature
0	INITIAL RELEASE	10/29/04	AVD
A	UPDATED	1/25/07	AVD

**** IMPORTANT ****
INSURE ELECTRICAL POWER IS OFF TO ELECTRICAL BOX BEFORE PROCEEDING!
MINIMUM 90* EC SUPPLY CONDUCTORS

INSTALLATION STEPS:

**** IMPORTANT **** INSURE ELECTRICAL SERVICE IS TURNED OFF BEFORE PROCEEDING

1. REMOVE ALL ITEMS FROM BOX. INSPECT FOR DAMAGE AND REPORT DAMAGED ITEM TO STONE MATHER DESIGNS.
2. FASTEN MOUNTING CROSS BAR TO OUTLET BOX.
3. CONNECT NEUTRAL WIRE (RIBBED SIDE) WITH WHITE SUPPLY WIRE AND CONNECT HOT WIRE WITH BLACK SUPPLY WIRE USING WIRE NUTS.
4. LOOP BARE COPPER GROUNDING WIRE AROUND GROUND SCREW ON CROSS BAR AND TIGHTEN. CONNECT GROUNDING WIRE FROM OUTLET BOX WITH BARE COPPER GROUNDING WIRE FROM FIXTURE USING WIRE NUT.
5. THREAD SCREWS FROM CANOPY INTO CROSSBAR BRACKET AND TIGHTEN TO SECURE TO CEILING.
6. INSTALL FELT PADS(8X) AND GLASS IN PENDANT RING (STEP #2)
7. BEND TABS DOWN TO HOLD GLASS IN PLACE (3X) (STEP #3)
8. CONNECT HANGER ARMS TO POD LOOPS USING CHAIN LINKS PROVIDED. INSURE THEY ARE ORIENTED AS SHOWN IN THE DIAGRAM. USE CHAIN PLIERS TO CLOSE CHAIN LINKS. (STEP #4)
9. LIFT THE BOWL ASSEMBLY TO POSITION AND HOOK EACH HANGER ARM INTO THE METAL LINKS ON RING AS SHOWN. (STEP#5)

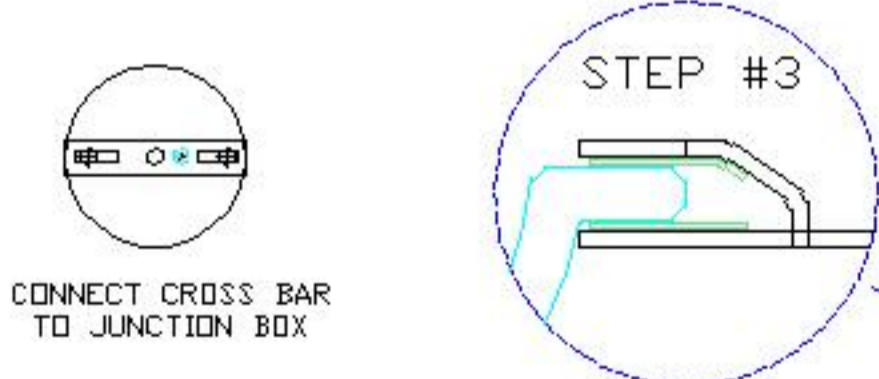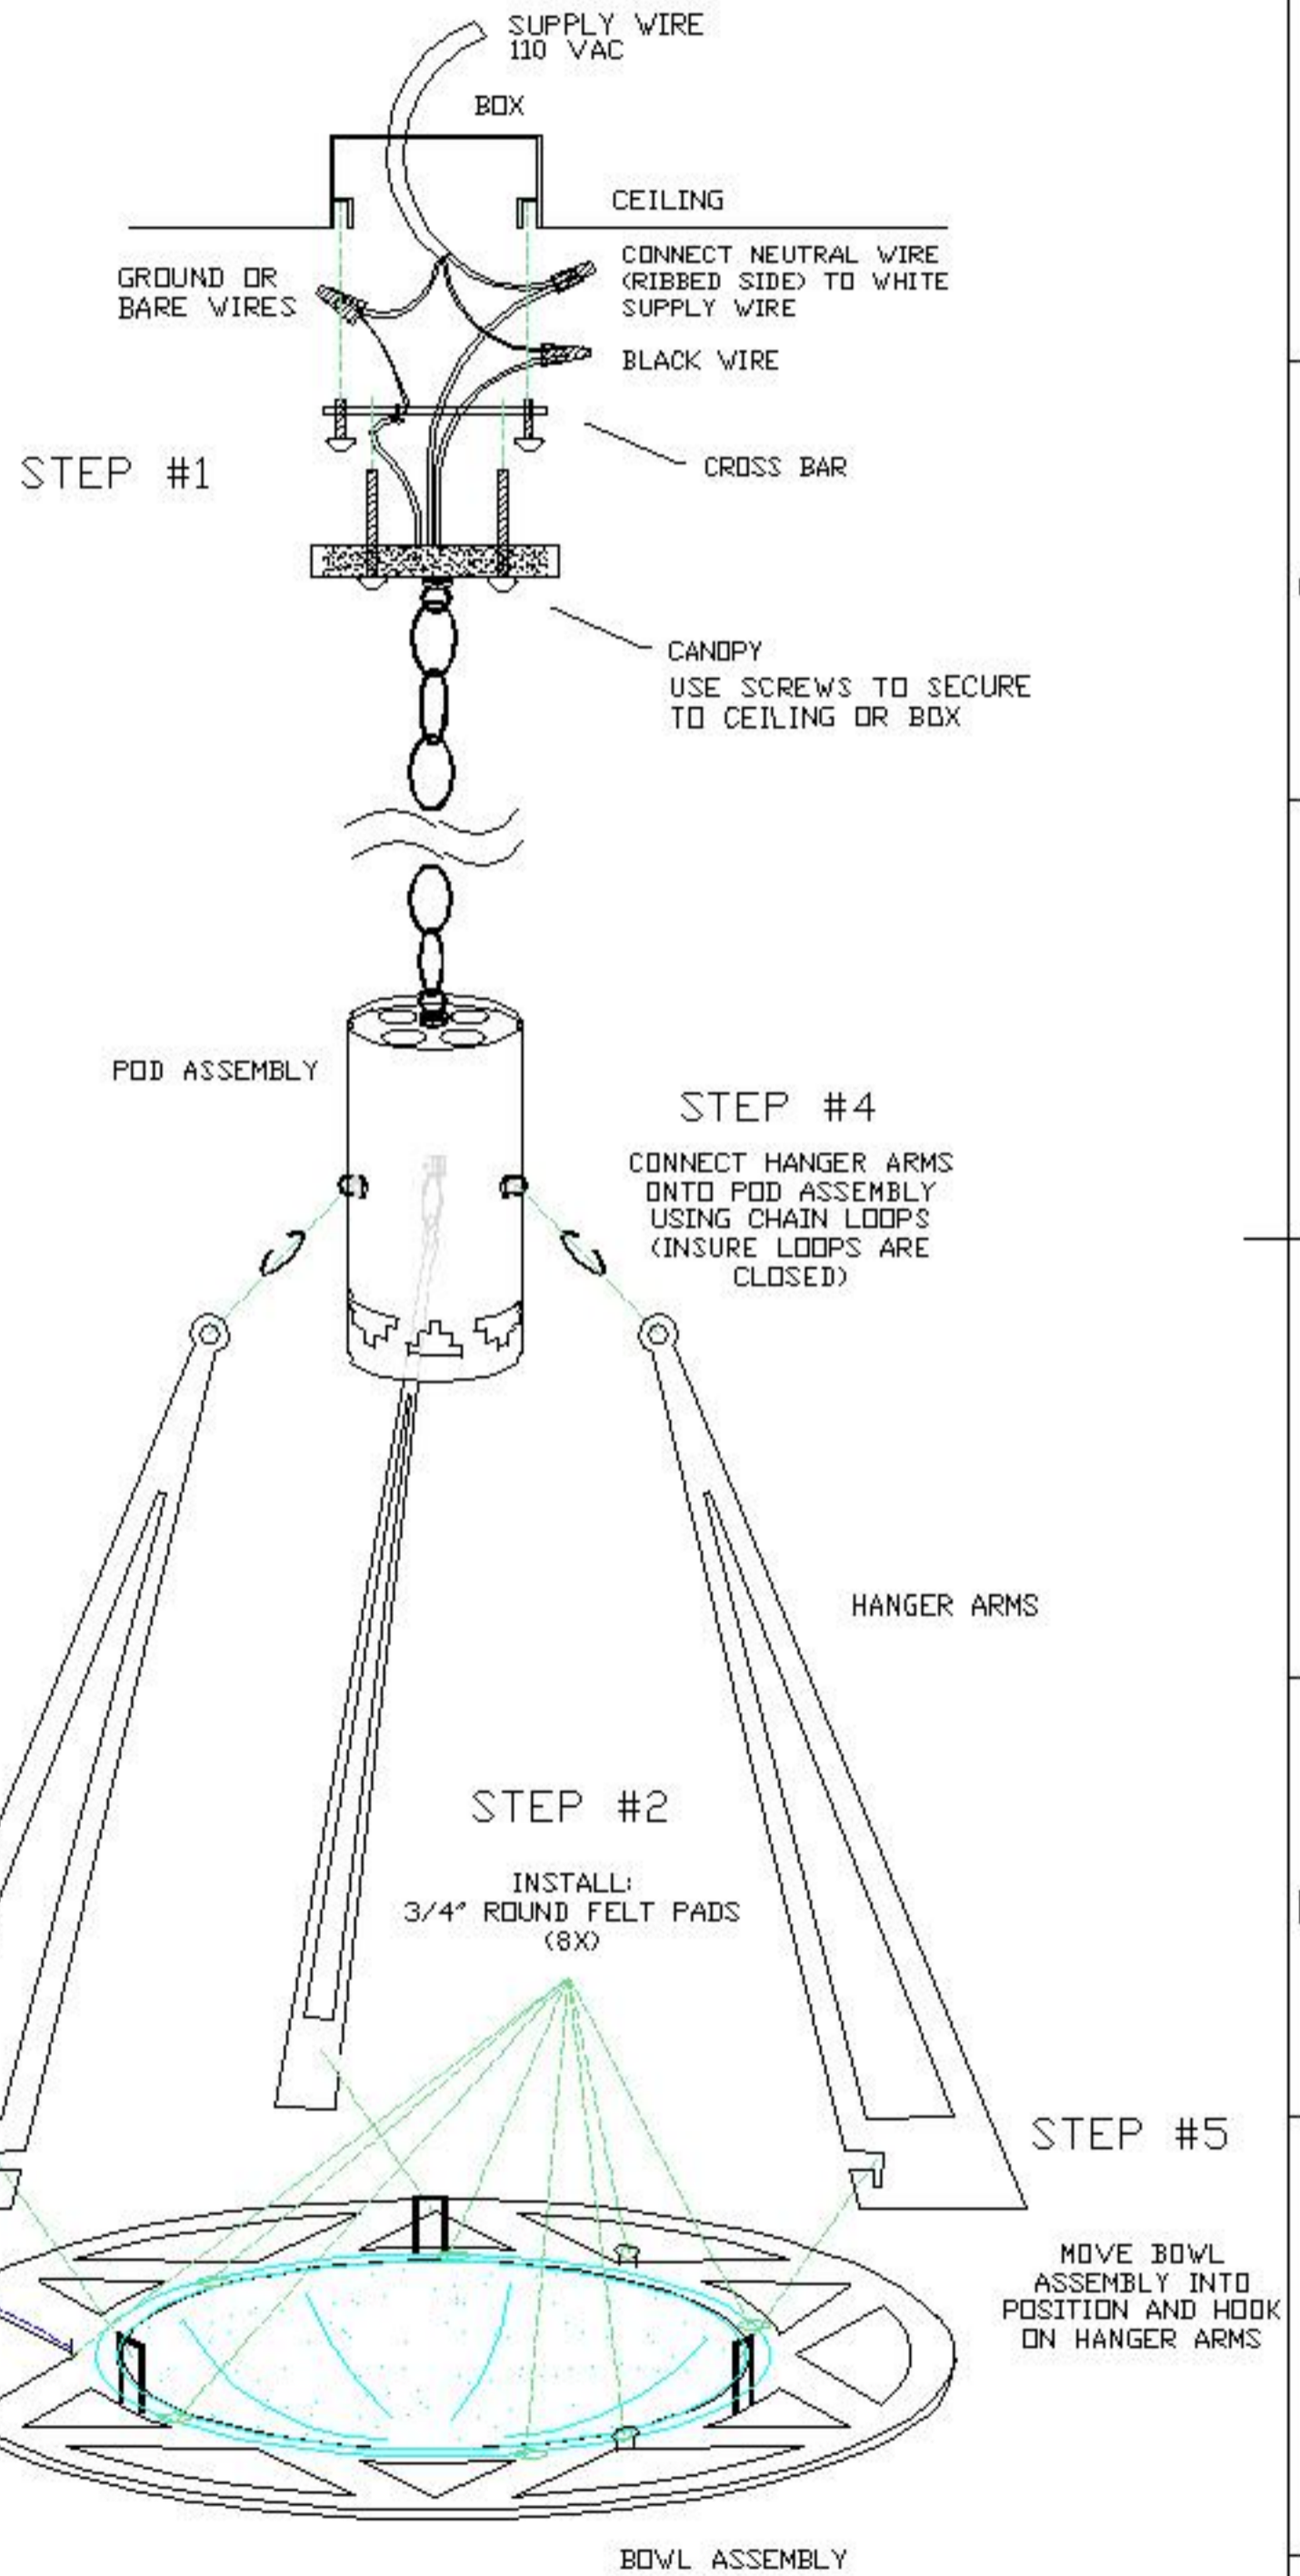

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED AND OR A QUALIFIED ELECTRICIAN.

U UNDERWRITERS LABORATORIES COMPLIANCE 1. INCANDESCENT FILE #E170691 2. FLUORESCENT FILE #E172522	STONE MATHER DESIGNS 4444 Tower Rd. SW Albuquerque, NM 87121 Phone (505) 247-4276 Fax (505) 247-4538	INSTALLATION INSTRUCTIONS GLASS PENDANT GPS, GPM		
		Date	11/29/2114	Designed by
				Sheet 1/1